

Filterlüfter
Filter Fan **LS 0**


LS 0 K



LS 0 (K)



LS 0

Technische Daten / Technical data :			
Type:	LS 0		
Spannung <i>Voltage</i>	230 V 50/60Hz	115 V 50/60Hz	24 V DC
Stromaufnahme <i>Amperage</i>	0,11 A	0,22 A	0,18 A
Leistung <i>Power input</i>	19/18 W		4,3 W
Drehzahl <i>Speed</i>	2650/3100 min ⁻¹		3050 min ⁻¹
Temperaturbereich <i>Temperature range</i>	-10...+55°C		-20...+65°C
Lebensdauer <i>Service life</i>	27.500 h		50.000 h
Schallpegel <i>Noise level</i>	51 dB (A)		51 dB (A)
Zulassung <i>Approval</i>	UL, CE		CE
Farben <i>colours</i>	RAL 7032		
Schutzart <i>Degree of protection</i>	IP 54 (mit Dichtung / with gasket)		
Luftfördermenge / Air flow: (m³/h)			
Filtermatte <i>Filter mat</i>	P15/350S	P15/500S	P15/350S + T3/290S
Luftleistung freiblasend <i>Air flow free air</i>	120	105	70
mit Austrittsfilter LG 11 <i>with exhaust filter</i>		90	7560

Zubehör / Accessories:

Austrittsfilter / Exhaust filter

Dichtung / gasket

Ersatzfiltermatte / Replacement filter mat


Thermostate / Thermostats

LG 11 (K)


D 11

AM 1135P, AM 11P, AM 11T

TRS 60, TRW 60, TWR 60, TKW 60

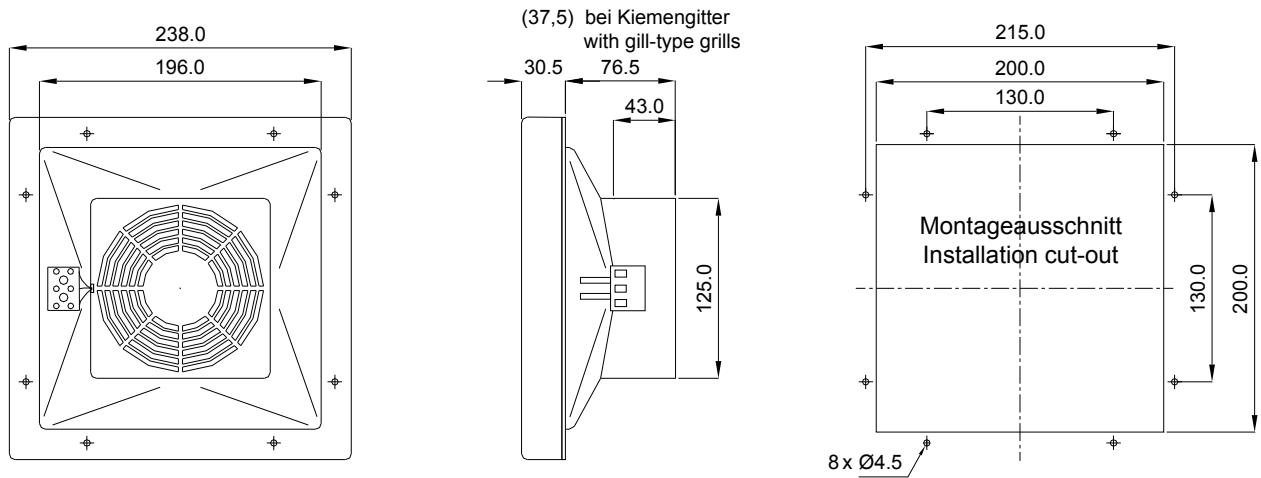

Leistungsdiagramm
Performance diagram

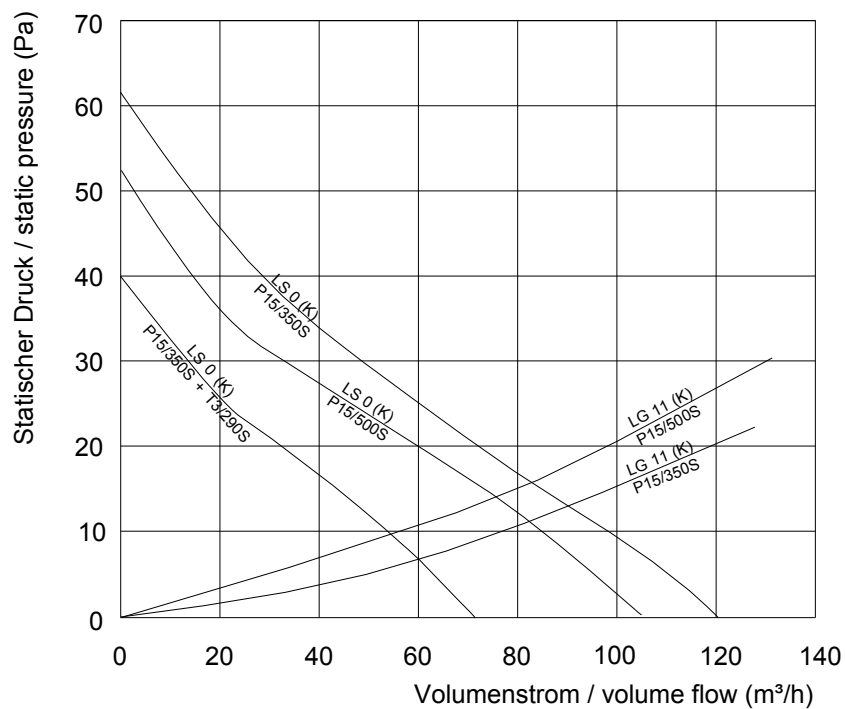

D-57290 Neunkirchen Am Scheid 4 Tel. 02735/7727-4 Fax 02735/7727-67
E-mail: info@ruebsamen-und-herr.de www.ruebsamen-und-herr.de



Komponenty elektro , Rakovecká 809, CZ 73543 Albrechtice tel. 777 884 900
E-mail: kontakt@koel.cz Web: www.in-electric.cz Eshop: www.k-electric.eu

